


125Lb.Flanged

Fig No.		9	
Material	Body	A 126B	
	Trim	C83600 or F6	
Standard		ASME	
Working Pressure		<ul style="list-style-type: none"> • 2"~12"/200PSI-WOG(100°F) 125PSI-Saturated Steam • 14"~24"/150PSI-WOG(100°F) 100PSI-Saturated Steam 	
Appearance			
Dimension		L	H
1 1/2 inch	40 mm		
2	50	203	110
2 1/2	65	216	120
3	80	241	135
4	100	292	155
5	125	330	180
6	150	356	200
8	200	495	230
10	250	622	305
12	300	698	355
14	350	570	410
16	400	630	470
18	450	700	520
20	500	770	570
24	600	920	650
Type		Swing Check	
Remark			

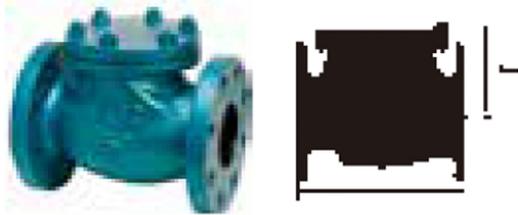

 +63-939-913-0553,
 +63-917-850-4147
 Fax: +63(2)8244-1234
 Tel.: +63(2)8244-7061 to 68

For Inquiries:
 sales10@upcc.com.ph
 For Concerns:
 inquiry@upcc.com.ph

 7th floor, Banawe Lifestyle
 Center Building, 86 Banawe
 St., Brgy. Sto. Domingo,
 Quezon City, Philippines