

2 PIECE FULL BORE VALVE THREADED




Features:

- Thread ends conform to ASME B1.20.1 (NPT)
- Full Bore
- Blow-out proof stem
- 1000 psi W.O.G
- Latch lock handle (option)
- Mounting pad (option)

Components

12	HANDLE SLEEVE	VINYL
11	THRUST WASHER	PTFE
10	STEM PACKING	PTFE
9	BODY SEAL	PTFE
8	BALL SEAT	R-PTFE
7	NUT & WASHER	AISI 304
6	GLAND NUT	AISI 304
5	HANDLE	AISI 304
4	STEM	AISI 316
3	BALL	A351 GR. CFM8 (SS 316)
2	END CAP	A351 GR. CFM8 (SS 316)
1	BODY	A351 GR. CFM8 (SS 316)
NO	NAME	MATERIAL

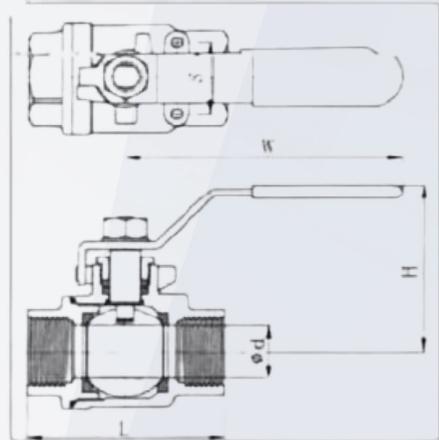

2 PIECE FULL BORE BALL VALVE NPT

- All dimension are in millimeter. (mm)
- CV is defined as the flow in GPM that a valve will carry with a pressure drop of 1 psi when liquid is water at 60 °F

Size	¼"	⅜"	½"	¾"	1"	1¼"	1½"	2"	2½"	3"	4"
Ød	11.6	12.7	15	20	25	32	38	50.8	65	80	100
L	61.5	61.5	63.3	76.7	91	100	118	137.5	166	193	260
H	48	48	49	55	69	77	84	93	138	149	155
W	120	120	120	130	155	155	185	185	250	250	280
S	28.5	28.5	28.5	34.8	34.8	38.1	38.1	38.1	65	65	65
Cv	5	7	10	25	35	46	80	110	310	360	820