

B[®] GATE VALVES- BOLTED BONNET- FULL & STANDARD PORT

BONNEY FORGE

800 LB.

1500 LB.

Design construction:

API 602 - ASME B16.34 - BS 5352

Testing according to API 598

Marking MSS SP25

Outside Screw and Yoke (OS&Y)

Self aligning two piece packing gland

Spiral-wound gasket

Integral backseat

Socket Weld Ends to ASME B16.11


Screwed Ends (NPT) to ASME B1.20.1

Butt Welding Ends to ASME B16.25

Ratings:

- carbon steel class 800 1975 psig @ 100°F
138 bar + 38°C

- carbon steel class 1500 3705 psig @ 100°F
255 bar + 38°C

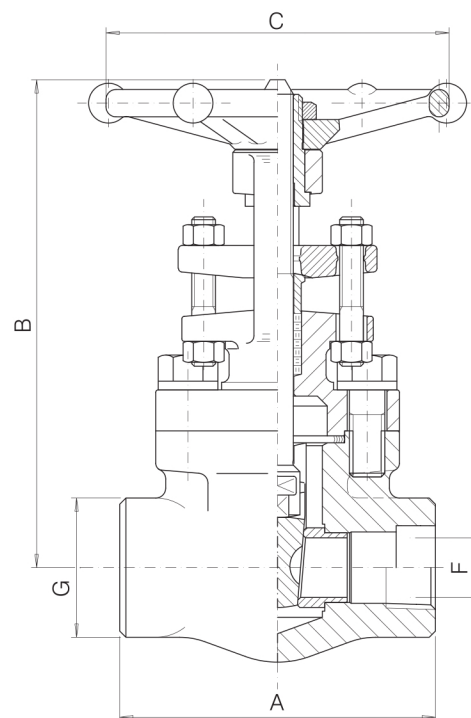

FULL PORT – FIG. H 10									
SIZE	inch mm	1/4 6	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50
A	inch mm	3.15 80	3.15 80	3.54 90	4.33 110	5 127	5 127	5.28 134	6 152
B open	inch mm	5.98 152	5.98 152	6.22 158	7.72 196	8.86 225	10.04 255	11.42 290	14.09 358
C	inch mm	3.46 88	3.46 88	3.46 88	3.82 97	5.43 138	5.43 138	5.43 138	6.77 172
F	inch mm	.31 8	.38 9.6	.55 14	.71 18	.94 24	1.18 30	1.48 36.5	1.83 46.5
G	inch mm	1.26 32	1.26 32	1.50 38	1.89 48	2.20 56	2.52 64	3.07 78	3.35 85
Weight	lb. kg	4.5 2.1	4.5 2.1	5 2.3	8.25 3.7	13 5.9	16.25 7.4	18.3 8.3	27.5 12.5
PACKING		BH2	BH2	BH2	BH4	BH5	BH6	BY5	BH8
GASKET		G2	G2	G2	G3	G4	G6	G11	G10

STANDARD PORT – FIG. HL 10							
SIZE	inch mm	1/2 15	3/4 20	1 25	1 1/2 40	2 50	3 80
A	inch mm	3.15 80	3.54 90	4.33 110	5 127	5.28 134	8.86 225
B open	inch mm	5.98 152	6.22 158	7.72 196	10.04 255	11.42 290	12.35 313
C	inch mm	3.46 88	3.46 88	3.82 97	5.43 138	5.43 138	6.77 172
F	inch mm	.38 9.6	.55 14	.71 18	1.18 30	1.48 37.5	1.97 50
G	inch mm	1.26 32	1.5 38	1.89 48	2.52 64	3.07 78	4.65 118
Weight	lb. kg	4.25 1.9	5 2.3	7.75 3.6	16 7.3	16.75 7.6	38 17.2
PACKING		BH2	BH2	BH4	BH6	BY5	BH8
GASKET		G2	G2	G3	G6	G11	G10

FULL PORT – FIG. 9H 10									
SIZE	inch mm	1/4 6	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50
A	inch mm	3.54 90	3.54 90	4.33 110	5 127	5 127	5 127	5 127	8.27 210
B open	inch mm	6.02 153	6.02 153	7.48 190	8.66 220	9.84 250	11.10 282	11.42 290	13.58 345
C	inch mm	3.46 88	3.46 88	3.82 97	5.43 138	5.43 138	5.43 138	5.43 138	6.77 172
F	inch mm	.31 8	.38 9.6	.55 14	.71 18	.94 24	1.18 30	1.48 36.5	1.89 48
G	inch mm	1.50 38	1.50 38	1.89 48	2.20 56	2.52 64	3.07 78	3.07 78	3.35 85
Weight	lb. kg	5.25 2.4	5.25 2.4	9 4.1	13.75 6.2	17.5 8	23 10.5	24.25 11	44 20
PACKING		BH3	BH3	BH5	BH6	2B4	BY7	2B5	9B8
GASKET		G1	G1	G2	G3	G4	G5	G7	G8

STANDARD PORT – FIG. 9HL 10						
SIZE	inch mm	1/2 15	3/4 20	1 25	1 1/2 40	2 50
A	inch mm	3.54 90	4.33 110	5 127	5 127	8.27 210
B open	inch mm	5.98 152	7.48 190	8.66 220	11.10 282	13.58 345
C	inch mm	3.46 88	3.82 97	5.43 138	5.43 138	5.43 138
F	inch mm	.38 9.6	.55 14	.71 18	1.18 30	1.48 36.5
G	inch mm	1.5 38	1.89 48	2.20 56	3.07 78	3.35 85
Weight	lb. kg	5.25 2.4	8.5 3.9	13.25 6.1	23.75 10.8	45.25 20.5
PACKING		BH3	BH5	BH6	2B5	BH8
GASKET		G1	G2	G3	G5	G7



+63-939-913-0553,
+63-917-850-4147
Fax: +63(2)8244-1234
Tel.: +63(2)8244-7061 to 68

For Inquiries:
sales10@upcc.com.ph
For Concerns:
inquiry@upcc.com.ph

7th floor, Banawe Lifestyle
Center Building, 86 Banawe
St., Brgy. Sto. Domingo,
Quezon City, Philippines