

ANSI – 125 / 150 CAST IRON SWING CHECK VALVE




Features:

- Face to face according to ANSI B 16.10
- Flange drilled is according to ANSI B 16.1
- Suitable Media: Water, Air, Low Pressure Steam, Non-corrosive Oils, Non-corrosive Chemicals

Components

8	Drain Plug	Stainless Steel
8	Pin	Stainless Steel
7	Nut	Carbon Steel
6	Bolt	Carbon Steel
5	Disc	Cast Iron
4	Arm	Cast Iron
3	Searing	Cast Bronze
2	Bonnet	Cast Iron
1	Body	Cast Iron
Part Name		Material

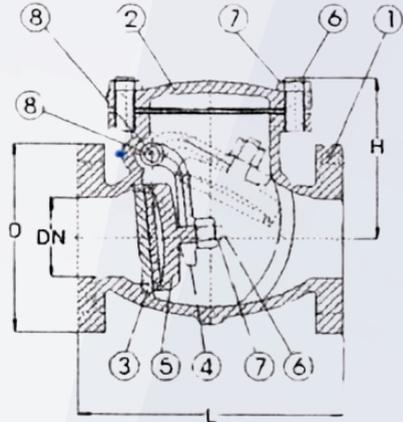

Test

Working Pressure	125 PSI	150 PSI
Test Pressure Shell	21.1 kgf/cm ²	
Seat	15.4 kgf/cm ²	

ANSI - 125 / 150 CAST IRON SWING CHECK VALVE

Dimension for ANSI 150 LB

DN	40	50	65	80	100	125	150	200	250	300	400
	1.5	2	2.5	3	4	5	6	8	10	12	16
L	165	203	216	241	292	330	356	495	622	698	914
H	101	102	114	139	152	170	203	246	292	330	405
D	127	152	178	191	229	254	279	343	406	483	597