


## ELBOW

### Coude

For dimensions B-C-D-G-J refer to  
dimensions of S.W. fittings  
*Dimensions B-C-D-G-J, voir  
caractéristiques dimensionnelles*

Class 3000 lbs. - 6000 lbs.  
Socket welding end and dimensions  
according to ASME: B16.11

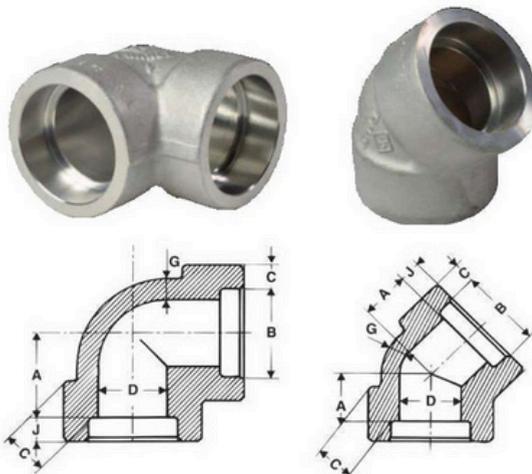

Nominal pipe size Diamètre nominal	Center to bottom of socket A - Centre au fond de l'emboîtement A					
	Coude 45°				Tolérances ±	
	3000		6000			
	inches	mm	inches	mm	inches	mm
1/4	0.31	8,0	0.31	8,0	0.03	1,0
3/8	0.31	8,0	0.44	11,0	0.06	1,5
1/2	0.44	11,0	0.50	12,5	0.06	1,5
3/4	0.50	13,0	0.56	14,0	0.06	1,5
1	0.56	14,0	0.69	17,5	0.08	2,0
1 1/4	0.69	17,5	0.81	20,5	0.08	2,0
1 1/2	0.81	20,5	1.00	25,5	0.08	2,0
2	1.00	25,5	1.12	28,5	0.08	2,0
2 1/2	1.12	28,5			0.10	2,5
3	1.25	32,0			0.10	2,5
4	1.62	41,0			0.10	2,5

5" and 6" Available on request (Forgings available from stock) Manufacturer standard