


Screwed (PT or NPT)

Fig No.	75		
Item	600-Ball (Full Bore)		
Material	※2 Brass		
Class	600Lb.		
Connection	NPT	PT	
Standard	ASME	JIS	BS
Working Pressure	<ul style="list-style-type: none"> • 4.10MPa-WOG(38°C) • 0.98MPa-Saturated Steam 		

Appearance

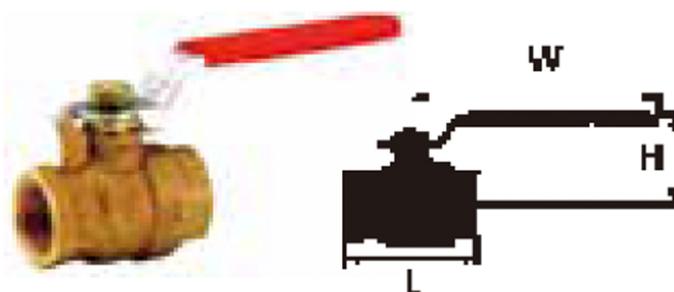

Dimension		L	H	W
1/4 inch	8mm	43	32	60
3/8	10	46	37	80
1/2	15	54	38	80
3/4	20	63	47	110
1	25	76	52	110
1 1/4	32	85	60	130
1 1/2	40	92	65	130
2	50	108	79	200
2 1/2	65	131	89	200
3	80	150	98	200
4	100	159	98	200

※2 Brass Material

Standard	Designation
ASTM	C37700
JIS	C3771B
BS	EN12165



☎ +63-939-913-0553,
+63-917-850-4147
☎ Fax: +63(2)8244-1234
☎ Tel.: +63(2)8244-7061 to 68

For Inquiries:
✉ sales10@upcc.com.ph
For Concerns:
✉ inquiry@upcc.com.ph

📍 7th floor, Banawe Lifestyle Center Building, 86 Banawe St., Brgy. Sto. Domingo, Quezon City, Philippines