


Yoneki

Brochure

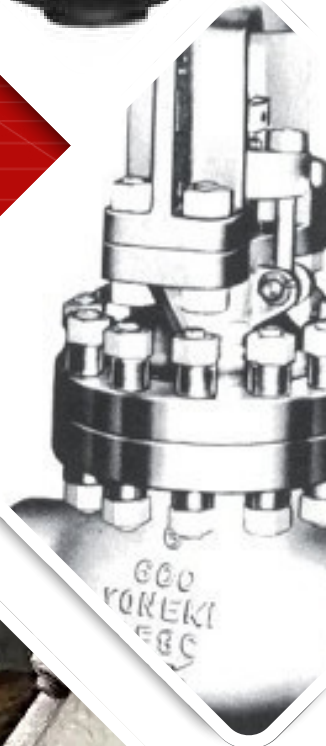

YONEKI VALVE

YONEKI VALVE

ANSI 150 CAST STEEL SWING CHECK VALVE BOLTED COVER

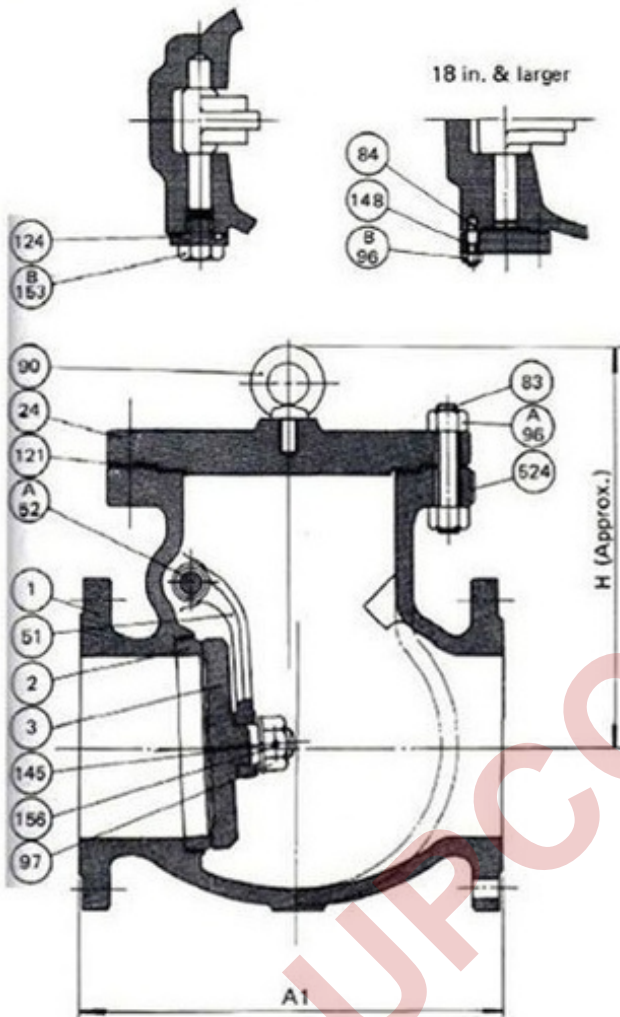


Figure No.

SC010RA	150 lb Swing Check RF
SC010WA	150 lb Swing Check Weld


■ Features

- End to end dimensions and Wall thicknesses conform to ANSI and API specifications.
- Flange dimensions: 24 in. and smaller Valves conform to ANSI B16.5.
- 26 in. and larger Valves conform to API 605.
- Internal Hinge pin design is available.
- Lift check valve also available. Data supplied upon request.

Material Specifications Trim No. B

No.	PART NAME	MATERIAL
524	Name Plate	18Cr-8Ni S. Steel
156	Knock Pin	18Cr-8Ni S. Steel
153B	Hinge Pin Plug	ASTM A105
153A	Disc Plug	ASTM A182 Gr. F6a
148	Hinge Pin Cover	ASTM A105
145	Disc Washer	18Cr-8Ni S. Steel
124	Hinge Pin Gasket	*6
121	Cover Gasket	*5
97	Disc Nut	18Cr-8Ni S. Steel
96B	Cover Bolt Nut	ASTM A194 Gr. 2H
96A	Cover Bolt Nut	ASTM A194 Gr. 2H
90	Eye Bolt	Carbon Steel *4
89	Set Bolt	18Cr-8Ni S. Steel
84	Cover Bolt	ASTM A193 Gr. B7
83	Cover Bolt	ASTM A193 Gr. B7
52B	Hinge Pin	ASTM A182 Gr. F6a
52A	Hinge Pin	ASTM A182 Gr. F6a
51	Swing Lever	ASTM A105 *3
24	Cover	ASTM A105 *2
3	Disc	ASTM A182 Gr. F6a *1
2	Body Seat Ring	ASTM A105 + STL
1	Body	ASTM A216 Gr. WCB

- Note *1 14 in. & larger ASTM A216 Gr. WCB + 13% Cr. deposit
*2 12 in. & larger ASTM A216 Gr. WCB
*3 8 in. & larger ASTM A216 Gr. WCB
*4 6 in. & larger
*5 Compressed asbestos or Corrugated metal
*6 Spiral wound 304 s. steel asbestos filled

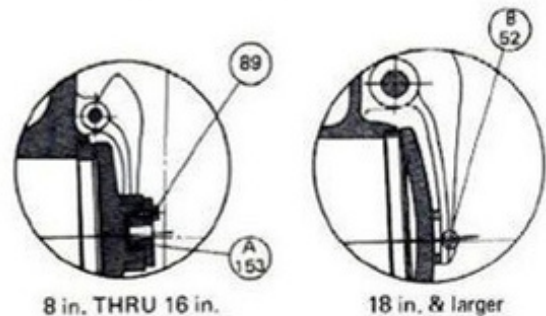

Dimensions (in./mm)

Nom. Size	2	3	4	5	6	8	10	12	14	16	18	20	24	26	28	30	36
A1	50	65	80	100	125	150	200	250	300	350	400	450	500	600	650	700	900
A2	203	216	241	292	330	356	455	522	622	698	787	864	978	1295	1448	1524	1956
H	6-1/8	7	7-1/2	8-5/8	9-1/4	10-3/4	15-1/8	17-5/8	21-1/4	22	24-5/8	27-5/8	28-3/8	31-3/8	34	41	53-1/8
Weight (lb)	44	53	77	121	185	293	549	741	1035	1455	1874	2315	3197	4250	5182	7191	1330
Weight (kg)	20	24	35	55	84	133	249	335	470	656	850	1070	1450	1920	2350	3260	6040
Weight (lb)	14	17	26	37	52	80	133	213	294	440	564	710	920	1210	1450	2250	3130
Weight (kg)	6.3	7.7	11.8	16.8	23.2	36.3	60.3	97.0	133.0	199.0	255.0	320.0	414.0	549.0	663.0	1020.0	1410.0

YONEKI VALVE

ANSI 150 CAST STEEL GLOBE VALVE

BOLTED BONNET O.S. & Y.



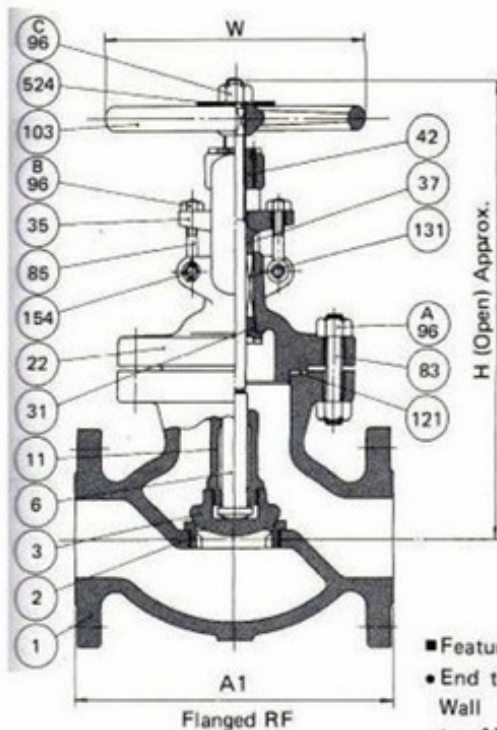


Figure No.

GL010RA	150 lb Globe RF
GL010WA	150 lb Globe Weld

Features

- End to end dimensions and Wall thicknesses conform to ANSI and API specifications.
- 10 in. and smaller Valves have a one piece Bonnet and Yoke design.
- 12 in. and larger Valves have a two piece Bonnet and Yoke design.
- Gear operator can be furnished upon request.
- 12 in. and larger Valves have hammer blow Handwheel.
- Angle and Stop check valves also available. Data supplied upon request.

Material Specifications Trim No. 8

NO.	PART NAME	MATERIAL
GU	Bevel Gear Unit	Cast Iron + etc.
524	Name Plate	18Cr-8Ni S. Steel
154	Eye Bolt Pin	13% Cr. S. Steel
131	Packing	*3
121	Gasket	*2
103	Handwheel	Nodular Iron
96D	Yoke Bolt Nut	ASTM A 194 Gr.2H
96C	Wheel Nut	Carbon Steel
96B	Eye Bolt Nut	ASTM A 194 Gr.2H
96A	Bonnet Bolt Nut	ASTM A 194 Gr.2H
85	Eye Bolt	ASTM A 193 Gr.B7
84	Yoke Bolt	ASTM A 193 Gr.B7
83	Bonnet Bolt	ASTM A 193 Gr.B7
42	Yoke Bush	Al-Bronze
37	Gland	ASTM A 182 Gr.F6a
35	Gland Flange	Carbon Steel
31	Bonnet Bush	ASTM A 182 Gr.F6a
22	Bonnet Yoke	ASTM A 216 Gr.WCB
11	Disc Stem Ring	ASTM A 182 Gr.F6a
6	Stem	ASTM A 182 Gr.F6a
3	Disc	ASTM A 182 Gr.F6a*1
2	Body Seat Ring	ASTM A 105 + STL
1	Body	ASTM A 216 Gr. WCB

- Note *1 12 in. & larger ASTM A216 Gr. WCB + 13% Cr. deposit
*2 Compressed asbestos or Corrugated metal.
*3 Inconel wire reinforced asbestos braided packing.

Dimensions (in./mm)

Dim.	2	3	4	5	6	8	10	12	14	16	18
Size	50	65	80	100	125	150	200	250	300	400	450
A1	8	8-1/2	9-1/2	11-1/2	14	16	19-1/2	24-1/2	27-1/2	31	36
	203	216	241	292	356	406	495	622	698	787	914
A2	8	8-1/2	9-1/2	11-1/2	14	16	19-1/2	24-1/2	27-1/2	31	36
	203	216	241	292	356	406	495	622	698	787	914
H	13-3/8	15-1/4	15-3/4	17-3/4	19-3/8	21-3/8	25-5/8	28-3/4	35	51	63-3/4
	340	387	400	476	492	543	651	730	890	1295	1619
W	7-7/8	7-1/8	9-7/8	11-13/16	11-13/16	14	17-11/16	19-11/16	22-1/16	24	24
	200	200	250	300	300	355	450	500	560	610	610
L	-	-	-	-	-	-	-	-	20-3/16	20-3/16	17
	-	-	-	-	-	-	-	-	512	512	432
Weight (Approx.)	63	77	82	139	221	267	401	650	1014	1521	2095
lb	24	35	37	63	100	121	182	293	440	690	950
Kg	42	66	64	106	187	221	331	496	838	1253	1874
WW	19	30	29	48	83	100	150	225	380	600	850
											1650

ANSI 150 CAST STEEL GATE VALVE BOLTED BONNET O.S. & Y.

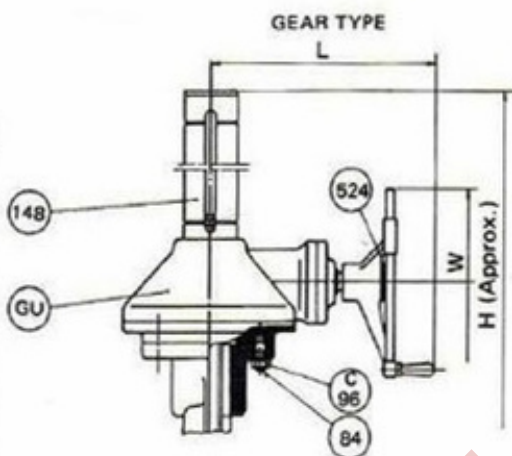

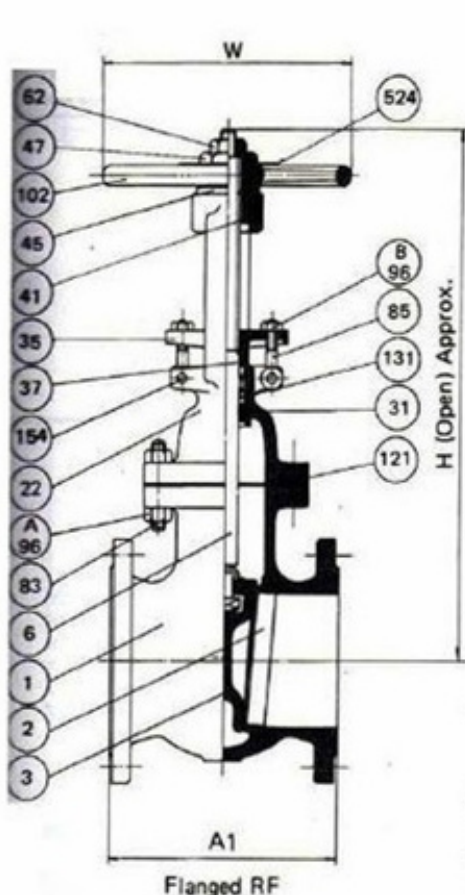


Figure No.

GA010RA	150 lb Gate RF
GA010WA	150 lb Gate Weld

1

BOLTED BONNET
GATE VALVES

■ Features

- End to end dimensions and Wall thicknesses conform to ANSI and API specifications.
- 8 in. and smaller Valves have a one piece Bonnet and Yoke design.
- 10 in. and larger Valves have a two piece Bonnet and Yoke design.
- 4 in. and smaller Valves have a plain solid Wedge.
- 5 in. and larger Valves have a one piece flexible Wedge.
- 2 in. Valves have a square Bonnet flange.
- 2-1/2 in. and larger Valves have an oval type Bonnet flange.
- Gear operator can be furnished upon request.
- Flange dimensions;
24 in. and smaller Valves conform to ANSI B16.5.
26 in. and larger Valves conform to API 605.

Material Specifications Trim No. 8

NO.	PART NAME	MATERIAL
GU	Bevel Gear Unit	Cast Iron + etc
524	Name Plate	18Cr-8Ni S. Steel
154	Eye Bolt Pin	13% Cr. S. Steel
148	Stem Cap	Carbon Steel
131	Packing	*3
121	Gasket	*2
102	Handwheel	Nodular Iron
96C	Yoke Bolt Nut	ASTM A194 Gr.2H
96B	Eye Bolt Nut	ASTM A194 Gr.2H
96A	Bonnet Bolt Nut	ASTM A194 Gr.2H
85	Eye Bolt	ASTM A193 Gr.B7
84	Yoke Bolt	ASTM A193 Gr.B7
83	Bonnet Bolt	ASTM A193 Gr.B7
62	Stopper	Carbon Steel
47	Lock Nut	Carbon Steel
45	Sleeve Nut	Carbon Steel
41	Yoke Sleeve	Al-Bronze
37	Gland	ASTM A182 Gr.F6a
35	Gland Flange	Carbon Steel
31	Bonnet Bush	ASTM A182 Gr.F6a
22	Bonnet Yoke	ASTM A216 Gr.WCB
6	Stem	ASTM A182 Gr.F6a
3	Wedge	ASTM A182 Gr.F6a *1
2	Body Seat Ring	ASTM A105 + STL
1	Body	ASTM A216 Gr.WCB




- Note *1 6 in. & 8 in. ASTM A217 Gr. CA15
10 in. & larger ASTM A216 Gr. WCB + 13% Cr. deposit
*2 Compressed asbestos or Corrugated metal
*3 Inconel wire reinforced asbestos braided packing

Dimensions (in./mm)

nom. size	in.	mm	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24	26	28	30	36	40	42	48
A1	in.	mm	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24	26	28	30	36	40	42	48
A2	in.	mm	178	190	203	229	254	267	292	330	356	381	406	432	457	508	559	610	610	711	762	787	864
H	in.	mm	14-0/8	17-1/2	18-3/4	22-5/4	25-3/8	30-3/8	38	47-1/4	55	64-1/8	68-1/2	81-3/4	89-3/8	105	119-3/8	122-7/8	131-5/8	164-1/4	183-7/8	199-3/4	213-1/2
W	in.	mm	7-2/8	7-7/8	9-7/8	9-7/8	13-13/16	11-43/16	14	15-3/4	19-11/16	22-4/16	23-5/8	18-1/8	18-1/8	24	24	24	24	24	30	30	30
L	in.	mm	200	200	250	250	300	300	355	400	500	560	600	660	660	610	610	610	610	610	760	760	760
Weight (Approx.)	lb	Kg	37	66	75	104	143	170	265	441	699	816	1036	1323	1654	2040	4190	4631	4410	8489	10617	11687	15678
	lb	Kg	17	30	34	48	65	77	120	200	290	370	470	600	710	925	1900	2100	2000	3850	4815	5300	7110
	lb	Kg	13	27	31	43	59	69	108	184	265	340	440	550	670	870	1945	2160	2030	3920	4940	5475	7350

YONEKI VALVE

ANSI 300 CAST STEEL GLOBE VALVE BOLTED BONNET O.S. & Y.

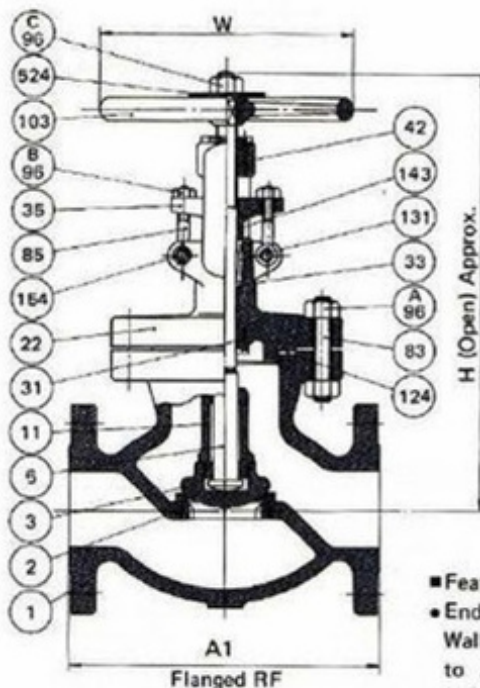

Features

- End to end dimensions and Wall thicknesses conform to ANSI and API specifications.
- 6 in. and smaller Valves have a one piece Bonnet and Yoke design.
- 8 in. and larger Valves have a two piece Bonnet and Yoke design.
- Gear operator can be furnished upon request.
- 8 in. and larger Valves have hammer blow Handwheel.
- Angle and Stop check valves also available. Data supplied upon request.

GEAR TYPE




Figure No.

GL030RA	300 lb Globe RF
GL030JA	300 lb Globe RTJ
GL030WA	300 lb Globe Weld

Material Specifications Trim No. 8


NO.	PART NAME	MATERIAL
GU	Bevel Gear Unit	Cast Iron + etc.
524	Name Plate	18Cr-8Ni S. Steel
154	Eye Bolt Pin	13% Cr. S. Steel
131	Packing	*3
124	Gasket	*2
103	Handwheel	Nodular Iron
96D	Yoke Bolt Nut	ASTM A 194 Gr.2H
96C	Wheel Nut	Carbon Steel
96B	Eye Bolt Nut	ASTM A 194 Gr.2H
96A	Bonnet Bolt Nut	ASTM A 194 Gr.2H
85	Eye Bolt	ASTM A 193 Gr.B7
84	Yoke Bolt	ASTM A 193 Gr.B7
83	Bonnet Bolt	ASTM A 193 Gr.B7
42	Yoke Bush	Al-Bronze
37	Gland	ASTM A 182 Gr.F6a
35	Gland Flange	Carbon Steel
33	Packing Washer	ASTM A 182 Gr.F6a
31	Bonnet Bush	ASTM A 182 Gr.F6a
22	Bonnet Yoke	ASTM A 216 Gr.WCB
11	Disc Stem Ring	ASTM A 182 Gr.F6a
6	Stem	ASTM A 182 Gr.F6a
3	Disc	ASTM A 182 Gr.F6a*1
2	Body Seat Ring	ASTM A 105 + STL
1	Body	ASTM A 216 Gr. WCB

- Note *1 10 in. & larger ASTM A 216 Gr. WCB + 13% Cr. deposit
*2 Spiral wound 304 s. steel asbestos filled
*3 Inconel wire reinforced asbestos braided packing

Dimensions (in./mm)

Item	1	2	3	4	5	6	8	10	12	14	16
Size	50	65	80	100	125	150	200	250	300	350	400
A1	10-1/2	11-1/2	12-1/2	14	15-3/4	17-1/2	22	24-1/2	28	32	42
A2	26 1/2	29 1/2	31 1/2	35 1/2	40 1/2	44 1/2	55 1/2	62 1/2	71 1/2	81 1/2	106 1/2
A3	11-1/2	12-1/2	13-1/2	14-3/4	16-1/4	17-1/2	22-1/2	25-1/2	28-1/2	32-1/2	42-1/2
H	28 1/2	30 1/2	33 1/2	37 1/2	41 1/2	46 1/2	57 1/2	63 1/2	72 1/2	82 1/2	106 1/2
A3	10-1/2	11-1/2	12-1/2	14	15-3/4	17-1/2	22	24-1/2	28	32	42
H	14-5/8	17-1/4	17-1/8	20-5/8	26-5/8	28-1/4	37	43	51-1/8	61-1/8	81
W	27 1/2	33 1/2	43 1/2	52 1/2	67 1/2	71 1/2	94	114 1/2	145 1/2	155 1/2	190
W	27 1/2	33 1/2	43 1/2	52 1/2	67 1/2	71 1/2	94	114 1/2	145 1/2	155 1/2	190
L	200	300	355	400	450	500	560	610	610	610	610
L	200	300	355	400	450	500	560	610	610	610	610
Weight	75	115	132	205	335	450	719	1257	2113	3368	4851
Weight	34	52	60	93	160	204	326	570	1050	1500	2200
Weight	69	88	97	150	287	335	555	958	1693	2977	4410
Weight	27	40	44	68	130	160	270	480	940	1350	2000

ANSI 300 CAST STEEL SWING CHECK VALVE BOLTED COVER

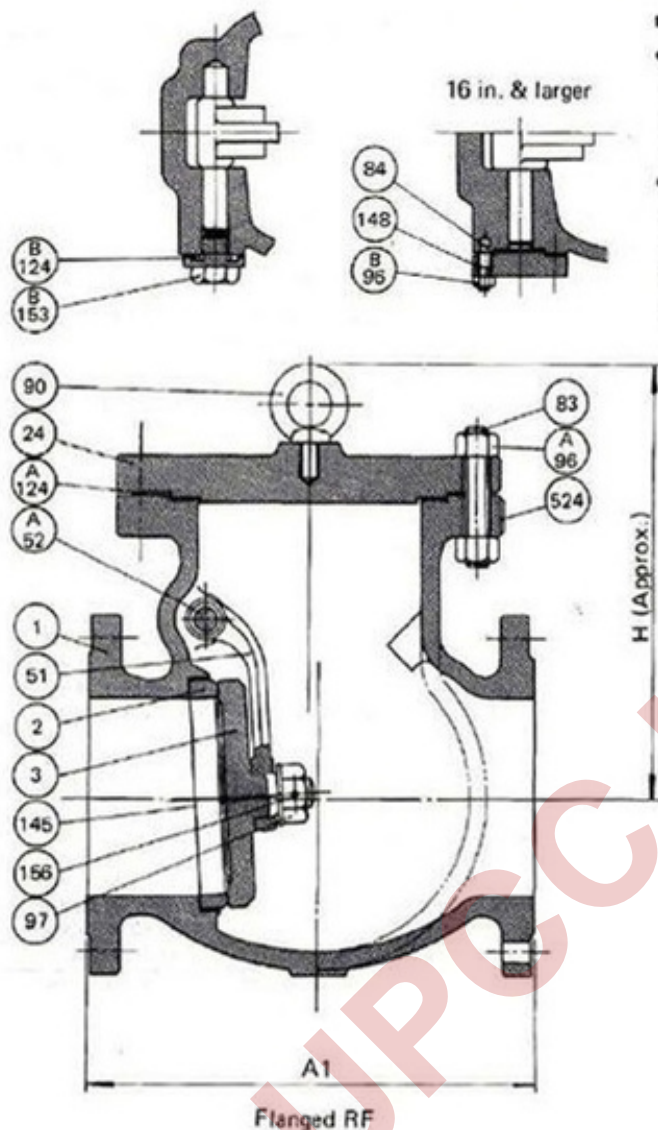

Features

- End to end dimensions and Wall thickness conform to ANSI and API specifications.
- Flange dimensions:
24 in. and smaller Valves conform to ANSI B16.5.
26 in. and larger Valves conform to API 605.

Figure No.



SC030RA	300 lb Swing Check RF
SC030JA	300 lb Swing Check RTJ
SC030WA	300 lb Swing Check Weld

- Internal Hinge pin design is available.
- Lift check valve also available. Data supplied upon request.

Material Specifications Trim No. 8

NO	PART NAME	MATERIAL
524	Name Plate	18Cr-8Ni S. Steel
156	Knock Pin	18Cr-8Ni S. Steel
153B	Hinge Pin Plug	ASTM A105
153A	Disc Plug	ASTM A182 Gr. F6a
148	Hinge Pin Cover	ASTM A105
145	Disc Washer	18Cr-8Ni S. Steel
124B	Hinge Pin Gasket	*5
124A	Cover Gasket	*5
97	Disc Nut	18Cr-8Ni S. Steel
96B	Cover Bolt Nut	ASTM A194 Gr. 2H
96A	Cover Bolt Nut	ASTM A194 Gr. 2H
90	Eye Bolt	Carbon Steel *4
89	Set Bolt	18Cr-8Ni S. Steel
84	Cover Bolt	ASTM A193 Gr. B7
83	Cover Bolt	ASTM A193 Gr. B7
52B	Hinge Pin	ASTM A182 Gr. F6a
52A	Hinge Pin	ASTM A182 Gr. F6a
51	Swing Lever	ASTM A105 *3
24	Cover	ASTM A105 *2
3	Disc	ASTM A182 Gr. F6a*1
2	Body Seat Ring	ASTM A105 + STL
1	Body	ASTM A216 Gr. WCB

- Note *1 14 in. & larger ASTM A216 Gr. WCB + 13% Cr. deposit
 *2 12 in. & larger ASTM A216 Gr. WCB
 *3 8 in. & larger ASTM A216 Gr. WCB
 *4 4 in. & larger
 *5 Spiral wound 304 s. steel asbestos filled

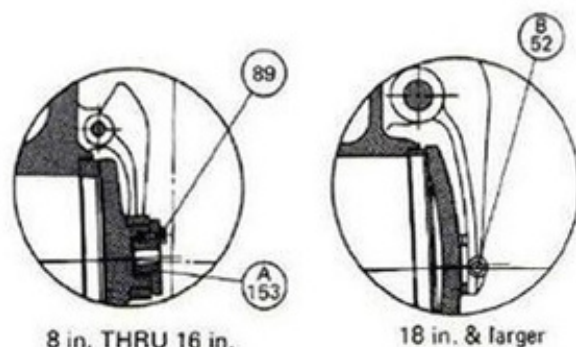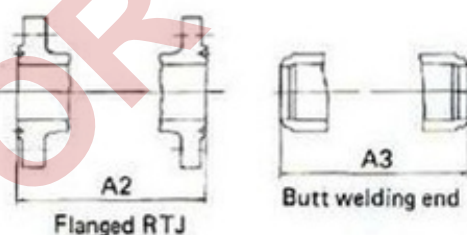

Dimensions (in./mm)

Num.	in.	2	3	4	5	6	8	10	12	14	16	18	20	24	26	28	30	34
Size	mm	50	65	80	100	125	150	200	250	300	350	400	450	500	600	650	700	900
A1	in.	10-1/2	11-1/2	12-1/2	14	15-3/4	17-1/2	21	24-1/2	28	33	34	38-1/2	40	53	59	62-3/4	82
	mm	267	292	318	356	400	444	533	622	711	838	864	978	1016	1346	1499	1594	2083
A2	in.	11-1/8	12-1/8	13-1/8	14-5/8	16-3/8	18-1/8	21-5/8	25-1/8	28-5/8	33-5/8	34-5/8	39-1/8	40-3/8	53-7/8	54	58	83-3/4
	mm	283	308	333	371	416	460	549	638	727	854	880	994	1035	1368	1372	1499	2108
A3	in.	10-1/2	11-1/2	12-1/2	14	15-3/4	17-1/2	21	24-1/2	28	33	34	38-1/2	40	53	59	62-3/4	82
	mm	267	292	318	356	400	444	533	622	711	838	864	978	1016	1346	1499	1594	2083
H	in.	2-3/4	3	3-1/4	4	4-5/8	5-1/4	6-1/4	7-1/4	8-1/4	9-1/4	10-1/4	11-1/4	12-1/4	15-1/4	16-1/4	17-1/4	22-1/4
	mm	197	203	222	276	295	337	413	464	562	597	645	759	854	940	1051	1149	1220
RF	in.	7-1/2	8	8-1/2	10	11-1/2	12-1/2	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	32-1/2	34-1/2	36-1/2	46-1/2
	mm	190	203	216	254	305	318	368	419	469	519	569	619	669	825	875	925	1181
RTJ	in.	7-1/2	8	8-1/2	10	11-1/2	12-1/2	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	32-1/2	34-1/2	36-1/2	46-1/2
	mm	190	203	216	254	305	318	368	419	469	519	569	619	669	825	875	925	1181
Weld	in.	7-1/2	8	8-1/2	10	11-1/2	12-1/2	14-1/2	16-1/2	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	32-1/2	34-1/2	36-1/2	46-1/2
	mm	190	203	216	254	305	318	368	419	469	519	569	619	669	825	875	925	1181

ANSI 600 CAST STEEL SWING CHECK VALVE BOLTED COVER


Features

- End to end dimensions and Wall thicknesses conform to ANSI and API specifications.
- Flange dimensions:
24 in. and smaller Valves conform to ANSI B16.5.
26 in. and larger Valves conform to API 605.

Figure No.

SC060 RA	600 lb Swing Check RF
SC060 J A	600 lb Swing Check RTJ
SC060WA	600 lb Swing Check Weld

- Internal Hinge pin design is available.
- Lift check valve also available. Data supplied upon request.

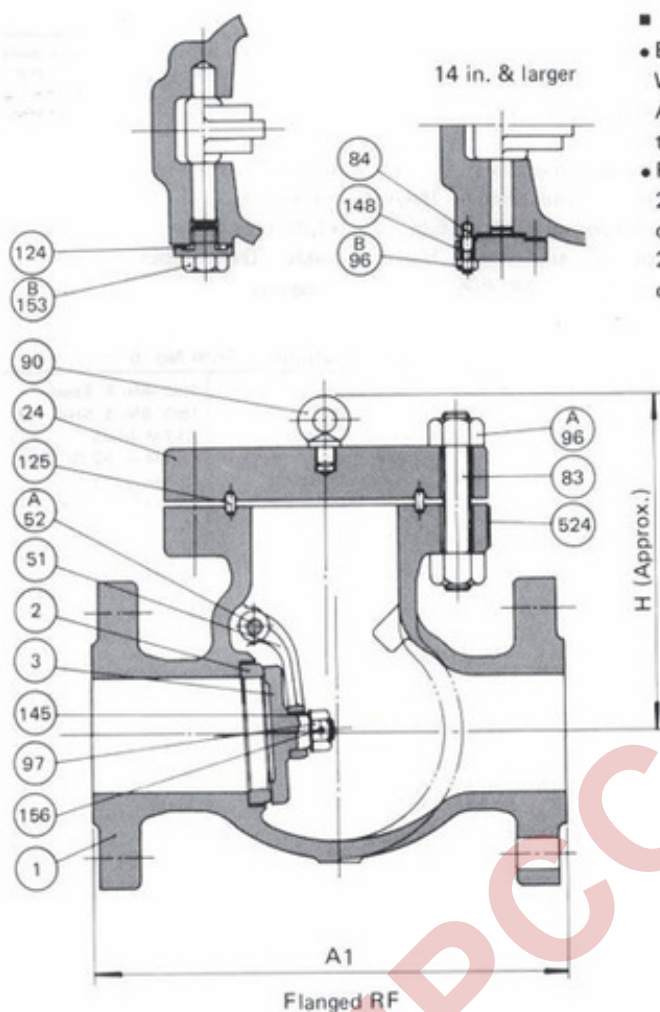



Material Specifications Trim No. 8

524	Name Plate	18Cr-8Ni S. Steel
156	Knock Pin	18Cr-8Ni S. Steel
153B	Hinge Pin Plug	ASTM A105
153A	Disc Plug	ASTM A182 Gr. F6a
148	Hinge Pin Cover	ASTM A105
145	Disc Washer	18 Cr-8Ni S. Steel
125	Cover Gasket	*6
124	Hinge Pin Gasket	*5
97	Disc Nut	18Cr-8Ni S. Steel
96B	Cover Bolt Nut	ASTM A194 Gr. 2H
96A	Cover Bolt Nut	ASTM A194 Gr. 2H
90	Eye Bolt	Carbon Steel *4
89	Set Bolt	18Cr-8Ni S. Steel
84	Cover Bolt	ASTM A193 Gr. B7
83	Cover Bolt	ASTM A193 Gr. B7
52B	Hinge Pin	ASTM A182 Gr. F6a
52A	Hinge Pin	ASTM A182 Gr. F6a
51	Swing Lever	ASTM A105 *3
24	Cover	ASTM A105 *2
3	Disc	ASTM A182 Gr. F6a *1
2	Body Seat Ring	ASTM A105 + STL
1	Body	ASTM A216 Gr. WCB

- Note *1 14 in. & larger ASTM A216 Gr. WCB + 13% Cr. deposit
 *2 12 in. & larger ASTM A216 Gr. WCB
 *3 8 in. & larger ASTM A216 Gr. WCB
 *4 3 in. & larger
 *5 Spiral wound 304 s. steel asbestos filled
 *6 Soft iron ring joint gasket

BOLTED COVER
SWING CHECK VALVES

6

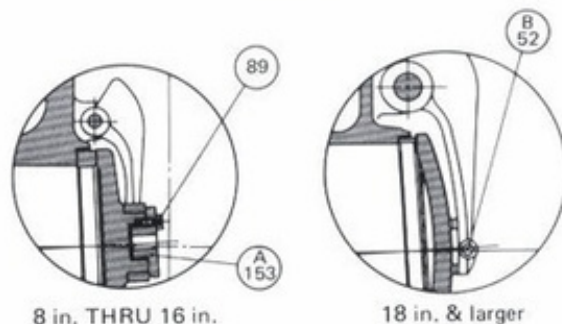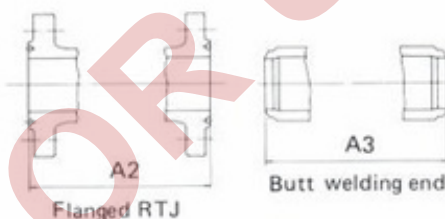

Dimensions (in./mm)

Dim.	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24	26	28	30
Size	50	65	80	100	125	150	200	250	300	350	400	450	500	600	650	700	750
A1	11-1/2	13	14	17	20	22	26	31	33	35	39	43	47	55	57	63	65
A2	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	1448	1600	1651
A3	11-5/8	13-1/8	14-1/8	17-1/8	20-1/8	22-1/8	26-1/8	31-1/8	33-1/8	35-1/8	39-1/8	43-1/8	47-1/8	55-3/8	57-1/2	63-1/2	65-1/2
H	295	333	359	435	511	562	664	791	841	892	994	1095	1200	1407	1461	1613	1664
RF	11-1/2	13	14	17	20	22	26	31	33	35	39	43	47	55	57	63	65
W	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	1448	1600	1651
W	8-1/4	8-5/8	10-1/2	11-3/4	13-1/4	15	18-3/4	21-5/8	22-5/8	26-3/8	30-1/8	35-1/4	38-3/8	43-3/4	48	53-1/8	56-1/4
W	210	219	267	299	337	381	476	549	575	670	765	895	975	1111	1219	1349	1429
RF	88	121	159	265	386	595	926	1367	1786	2426	3197	3969	4631	6615	7718	9041	11025
W	40	55	72	120	175	270	420	620	810	1100	1450	1800	2100	3000	3500	4100	5000
W	68	99	132	187	276	496	805	1103	1577	1940	2514	3197	3638	5072	6615	7718	9482
W	31	45	60	85	125	225	365	500	715	880	1140	1450	1650	2300	3000	3500	4300



GATE



CHECK



BALL



Y-STRAINER



GLOBE

SPECIFICATIONS:

STANDARDS:

ASTM A105 , API, ASME, AND ANSI B16.5

- size: 1/4" - 48"
- Thickness: Class 150 -2,500
- All Items will have an accompanying Mill Test Certificate upon request

APPLICATIONS:

- Industrial
- Residential
- Petrochemical Plants
- Oil & Gas
- Refineries
- Sugar Mills
- Energy
- Construction & Infrastructure
- Chemicals
- Machineries
- Boilers
- Food & Beverage
- Shipping
- Desalination Plant
- Power Plants
- Automotive & Transport
- High-Pressure Vessel

WHY CHOOSE US?

1 RELIABLE

Since 1961, We have been a trusted vendor for some of the Philippines' biggest companies across sectors in Oil Refinery, Petroleum, Geothermal, LNG, LPG, Power/Energy, Chemical, Sugar Mill, Food/Beverage, Distillery & International Sub-Contractors.

2 COMPETITIVE PRICING

As a Direct Importer, Wholesaler, Retailer, Stockist, and Exclusive Agent, we can offer our clients the most competitive of prices in an ever changing market.

3 QUALITY PRODUCTS

We carry a wide range of materials that conforms to various International Standards such as ASME, ANSI, WRAS, BSI, and ULFM.





UPCC 2025