


Delcorte Fittings


Brochure

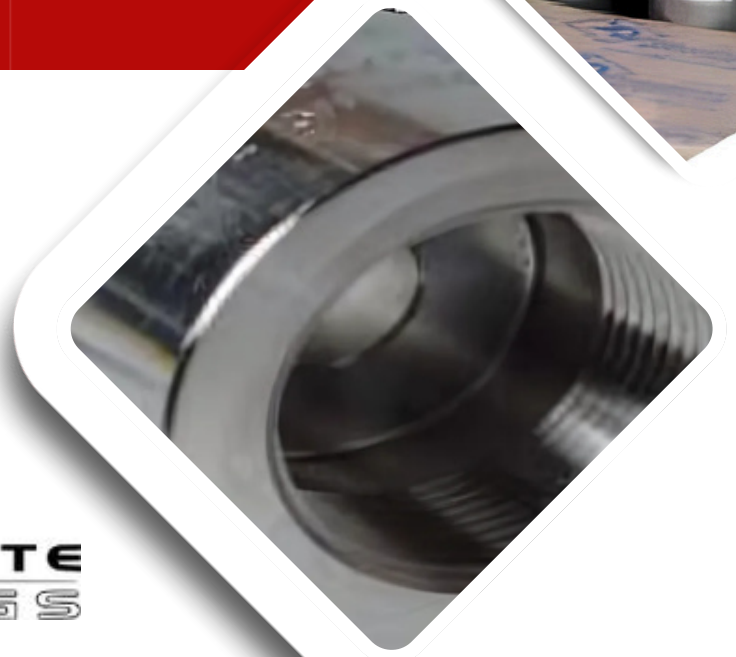


I. HIGH PRESSURE DIVISION DIVISION HAUTE PRESSION

1. Forged fittings (carbon, alloy, stainless steels, duplex, super duplex and nickel alloy)

Raccords forgés (acier carbone, alliés, inoxydables)

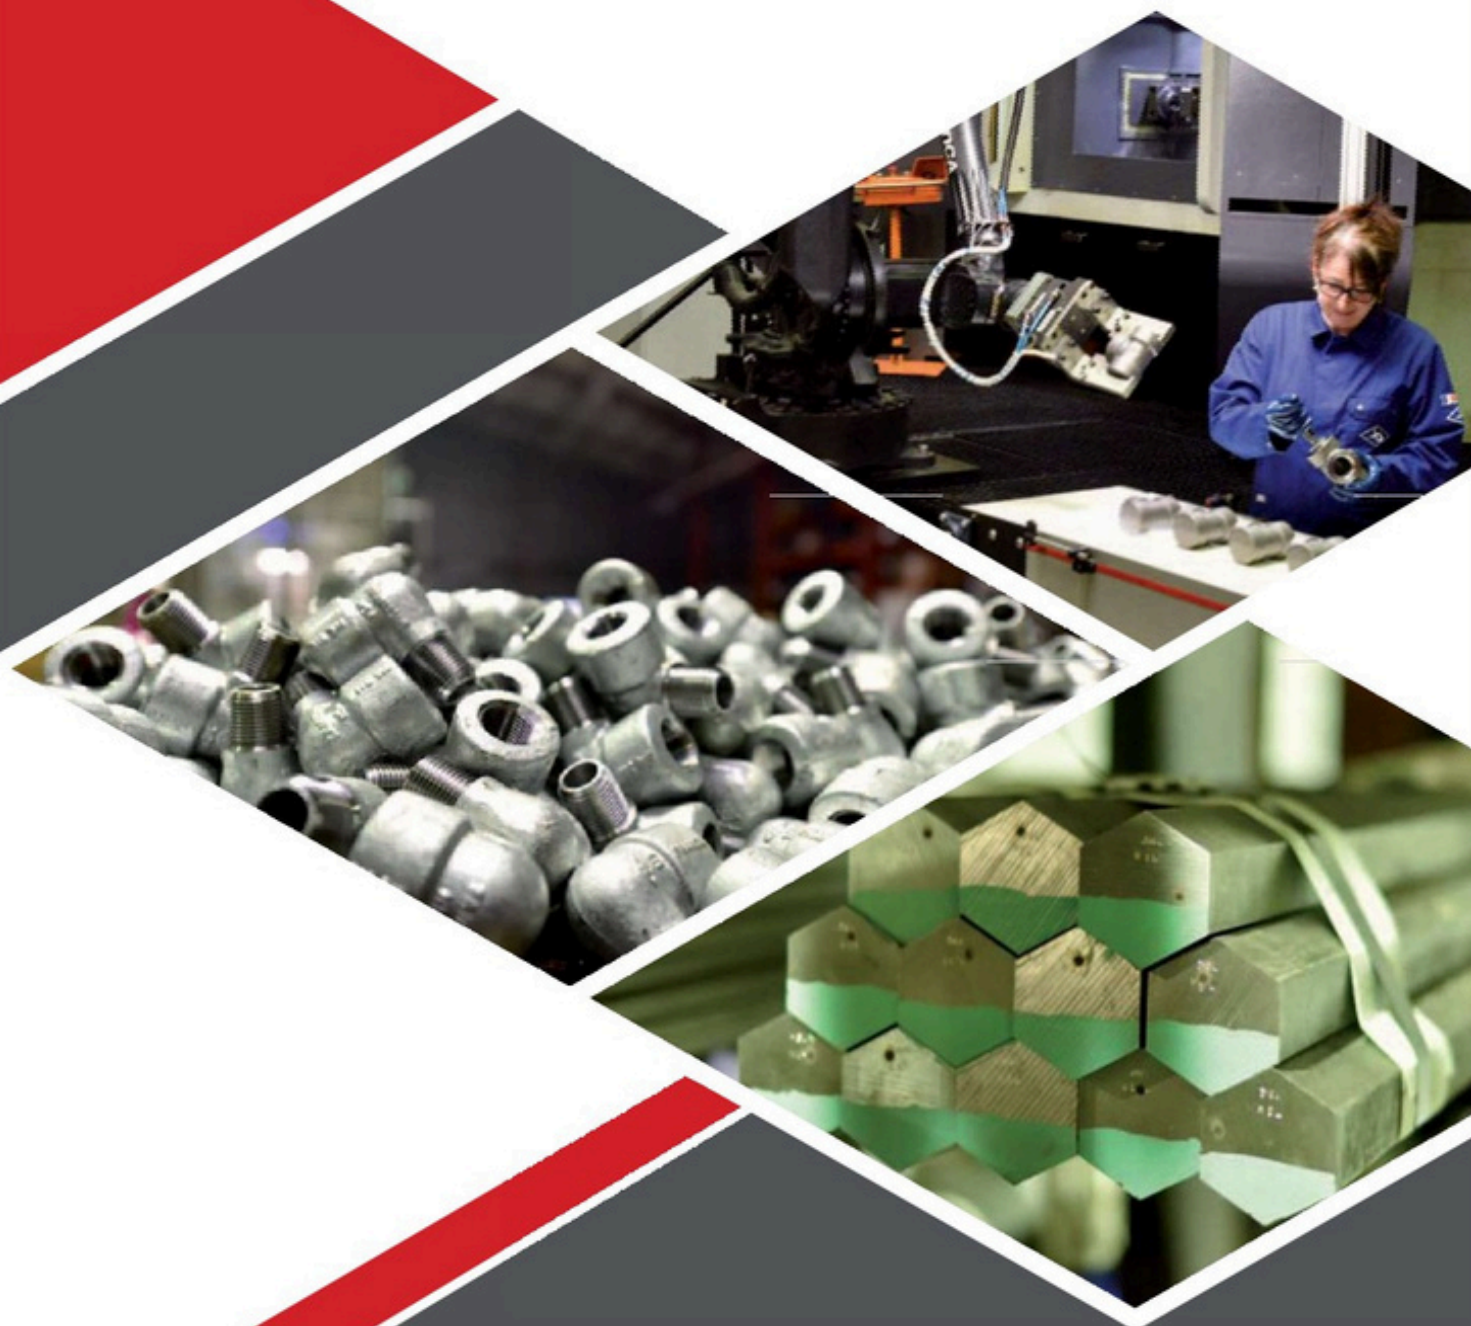

90° ELBOW Coude 90°

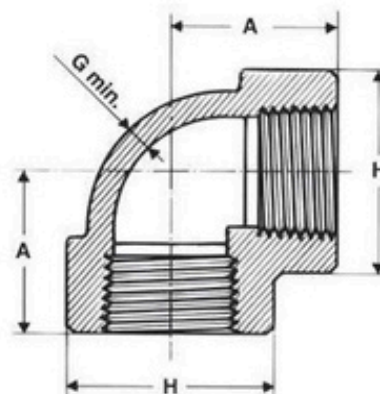


Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1

Nominal pipe size Diamètre nominal	3000						6000					
	A		H		G		A		H		G	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.97	25	1.00	25	0.130	3,30	1.12	28	1.31	33	0.260	6,60
3/8	1.12	28	1.31	33	0.138	3,51	1.31	33	1.50	38	0.275	6,98
1/2	1.31	33	1.50	38	0.161	4,09	1.50	38	1.81	46	0.321	8,15
3/4	1.50	38	1.81	46	0.170	4,32	1.75	44	2.19	56	0.336	8,53
1	1.75	44	2.19	56	0.196	4,98	2.00	51	2.44	62	0.391	9,93
1 1/4	2.00	51	2.44	62	0.208	5,28	2.38	60	2.97	75	0.417	10,59
1 1/2	2.38	60	2.97	75	0.219	5,56	2.50	64	3.31	84	0.436	11,07
2	2.50	64	3.31	84	0.281	7,14	3.25	83	4.00	102	0.476	12,09
2 1/2	3.25	83	4.00	102	0.301	7,65	3.75	95	4.75	121	0.602	15,29
3	3.75	95	4.75	121	0.348	8,84	4.19	106	5.75	146	0.655	16,64
4	4.50	114	6.00	152	0.440	11,18	4.50	114	6.00	152	0.735	18,67

5" and 6" Available on request (Forgings available from stock) Manufacturer standard

45° ELBOW Coude 45°

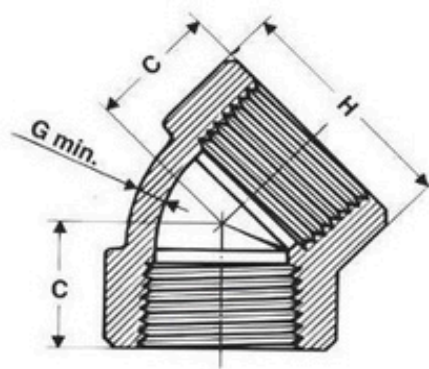

Class 3000 lbs. - 6000 lbs.
Dimensions: ASME B 16.11
Thread: ASME B 1.20.1



Nominal pipe size Diamètre nominal	3000						6000					
	C		H		G		C		H		G	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.75	19	1.00	25	0.130	3,30	0.88	22	1.31	33	0.260	6,60
3/8	0.88	22	1.31	33	0.138	3,51	1.00	25	1.50	38	0.275	6,98
1/2	1.00	25	1.50	38	0.161	4,09	1.12	28	1.81	46	0.321	8,15
3/4	1.12	28	1.81	46	0.170	4,32	1.31	33	2.19	56	0.336	8,53
1	1.31	33	2.19	56	0.196	4,98	1.38	35	2.44	62	0.391	9,93
1 1/4	1.38	35	2.44	62	0.208	5,28	1.69	43	2.97	75	0.417	10,59
1 1/2	1.69	43	2.97	75	0.219	5,56	1.72	44	3.31	84	0.436	11,07
2	1.72	44	3.31	84	0.281	7,14	2.06	52	4.00	102	0.476	12,09
2 1/2	2.06	52	4.00	102	0.301	7,65	2.50	64	4.75	121	0.602	15,29
3	2.50	64	4.75	121	0.348	8,84	3.12	79	5.75	146	0.655	16,64
4	3.12	79	6.00	152	0.440	11,18	3.12	79	6.00	152	0.735	18,67

5" and 6" Available on request (Forgings available from stock) Manufacturer standard

ELBOW Coude

For dimensions B-C-D-G-J refer to
dimensions of S.W. fittings
*Dimensions B-C-D-G-J, voir
caractéristiques dimensionnelles*

Class 3000 lbs. - 6000 lbs.
Socket welding end and dimensions
according to ASME: B16.11

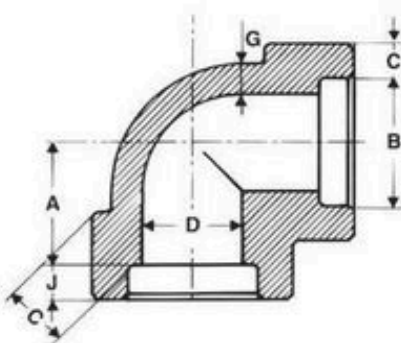

Nominal pipe size Diamètre nominal	Center to bottom of socket A - Centre au fond de l'emboîtement A					
	Coude 45°				Tolérances ±	
	3000		6000			
	inches	mm	inches	mm	inches	mm
1/4	0.31	8,0	0.31	8,0	0.03	1,0
3/8	0.31	8,0	0.44	11,0	0.06	1,5
1/2	0.44	11,0	0.50	12,5	0.06	1,5
3/4	0.50	13,0	0.56	14,0	0.06	1,5
1	0.56	14,0	0.69	17,5	0.08	2,0
1 1/4	0.69	17,5	0.81	20,5	0.08	2,0
1 1/2	0.81	20,5	1.00	25,5	0.08	2,0
2	1.00	25,5	1.12	28,5	0.08	2,0
2 1/2	1.12	28,5			0.10	2,5
3	1.25	32,0			0.10	2,5
4	1.62	41,0			0.10	2,5

5" and 6" Available on request (Forgings available from stock) Manufacturer standard

CAP


Bouchon femelle

For dimensions B-J refer to
dimensions of S.W. fittings

Dimensions B-J, voir
caractéristiques dimensionnelles

Class 3000 lbs. - 6000 lbs.

Socket welding end and dimensions
according to ASME: B16.11

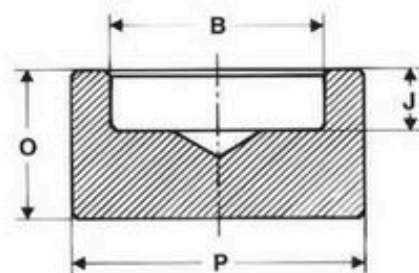

Nominal pipe size Diamètre nominal	3000				6000			
	O ⁽¹⁾		P ⁽¹⁾		O ⁽¹⁾		P ⁽¹⁾	
	inches	mm	inches	mm	inches	mm	inches	mm
1/4	0.79	20	0.87	22	0.79	20	0.90	26
3/8	0.79	20	1.02	26	0.79	20	1.10	28
1/2	0.79	20	1.26	32	0.87	22	1.38	35
3/4	0.94	24	1.50	38	0.98	25	1.57	45
1	1.06	27	1.77	45	1.10	28	1.97	50
1 1/4	1.06	27	2.17	55	1.10	28	2.36	60
1 1/2	1.10	28	2.48	63	1.18	30	2.64	67
2	1.30	33	2.95	75	1.42	36	3.35	85
2 1/2	1.42	36	3.62	95	1.53	39	3.94	100
3	1.57	40	4.33	110	1.73	44	4.72	120
4	1.77	45	5.51	140	2.01	51	5.91	150

⁽¹⁾ Dimensions not listed in ASME B 16.11 and BS 3799 may vary according to the manufacturer.

⁽¹⁾ Dimensions non reprises dans ASME B 16.11 ET BS 3799, pouvant varier selon le fabricant.

FITTINGS WE OFFER



**ELBOW
(90° OR 45°)
LR/SR**



**TEE
REDUCER**



**TEE OR
TEE EQUAL**



**EXCENTRIC
REDUCER**



**CONCENTRIC
REDUCER**

SPECIFICATIONS:

STANDARDS:

ASTM A105 , API, ASME, AND ANSI B16.5

- size: 1/4" - 48"
- Thickness: Class 150-2,500
- All Items will have an accompanying Mill Test Certificate upon request

APPLICATIONS:

- Industrial
- Residential
- Petrochemical Plants
- Oil & Gas
- Refineries
- Sugar Mills
- Energy
- Construction & Infrastructure
- Chemicals
- Machineries
- Boilers
- Food & Beverage
- Shipping
- Desalination Plant
- Machineries
- Automotive & Transport
- High-Pressure Vessel
- Power Plants

WHY CHOOSE US?

1 RELIABLE

Since 1961, We have been a trusted vendor for some of the Philippines' biggest companies across sectors in Oil Refinery, Petroleum, Geothermal, LNG, LPG, Power/Energy, Chemical, Sugar Mill, Food/Beverage, Distillery & International Sub-Contractors.

2 COMPETITIVE PRICING

As a Direct Importer, Wholesaler, Retailer, Stockist, and Exclusive Agent, we can offer our clients the most competitive of prices in an ever changing market.

3 QUALITY PRODUCTS

We carry a wide range of materials that conforms to various International Standards such as ASME, ANSI, WRAS, BSI, and ULFM.



+63-939-913-0553,
+63-917-850-4147
Fax: +63(2) 8244-1234
Tel.: +63(2) 8244-7061 to 68

For Inquiries:
sales10@upcc.com.ph
For Concerns:
tiugregian@upcc1.com

7th floor, Banawe Lifestyle
Center Building, 86 Banawe
St., Brgy. Sto. Domingo,
Quezon City, Philippines

