

## CLASS 300 CAST STAINLESS STEEL BALL VALVE FLANGED ENDS

KITZ Fig: 300UTDZM

Sizes: 1/2-8inch(15-200mm)

ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211

Standards

- . End to End: ASME B16.10 CLASS 300
- . End Connection: ASME B16.5 CLASS 300
- . Wall Thickness: ASME B16.34 CLASS 300

Test Standard

- . API 598

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
1/2 15	140.0	0.0	108.0	130.0	0.00
3/4 20	152.0	0.0	111.0	130.0	0.00
1 25	165.0	0.0	124.0	160.0	0.00
1 1/4 32	178.0	0.0	128.0	160.0	0.00
1 1/2 40	190.0	0.0	134.0	230.0	0.00
2 50	216.0	0.0	143.0	230.0	0.00
2 1/2 65	241.0	0.0	179.0	400.0	0.00
3 80	283.0	0.0	188.0	400.0	0.00
4 100	305.0	0.0	251.0	750.0	0.00
5 125	381.0	0.0	267.0	750.0	0.00
6 150	403.0	0.0	314.0	1000.0	0.00
8 200	502.0	0.0	406.0	1500.0	0.00

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
BODY CAP	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
STEM	STAINLESS STEEL	316SS
BALL	STAINLESS STEEL	A351 Gr. CF8M/SCS14A

Specifications

CLASS 300 CAST STAINLESS STEEL BALL VALVE FLANGED ENDS, ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211


End to End : ASME B16.10 CLASS 300, End Connection : ASME B16.5

CLASS 300, Wall Thickness : ASME B16.34 CLASS 300, Test Standard :

API 598, Sizes : 1/2-8inch(15-200mm), BODY MATERIAL : STAINLESS

STEEL, BODY CAP MATERIAL : STAINLESS STEEL, STEM MATERIAL : STAINLESS

STEEL, BALL MATERIAL : STAINLESS STEEL, KITZ Fig : 300UTDZM

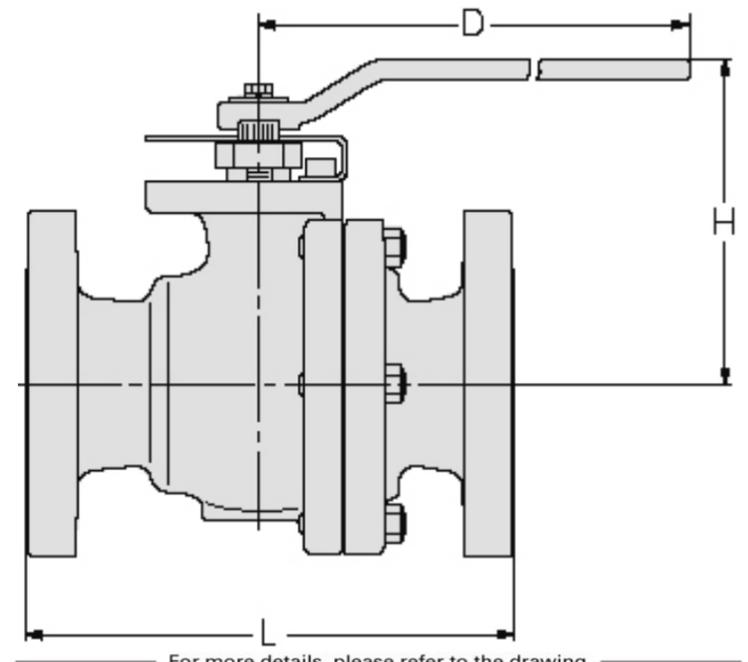

For more details, please refer to the drawing.