


ASME 同径Tの形状・寸法・重量 / DIMENSIONS OF STRAIGHT TEE



STRAIGHT TEE

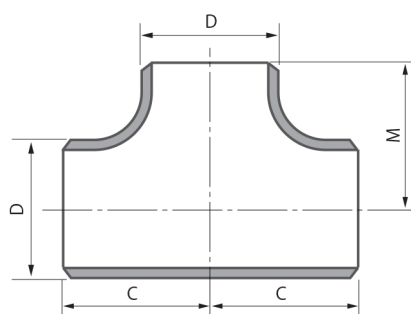

ASME B 16.9

Nominal Pipe Size (NPS)	Dimensions (Unit:mm)			Carbon & Alloy Steel Weight (Unit:kg)														Stainless Steel Weight (Unit:kg)			
	Outside Diameter at Bevel	Center - to - End																			
		Run	Outlet	STD	XS	XXS	S40	S80	S120	S160	S10	S20	S30	S60	S100	S140	S10S	S40S	S80S	S160	
	D	C	M																		
1/2	21.3	25	25	0.102	0.118	0.170	0.102	0.118	-	0.139	-	-	-	-	-	-	0.100	0.120	0.120	0.150	
3/4	26.7	29	29	0.136	0.180	0.250	0.136	0.180	-	0.211	-	-	-	-	-	-	0.140	0.170	0.190	0.220	
1	33.4	38	38	0.300	0.388	0.544	0.300	0.388	-	0.424	-	-	-	-	-	-	0.310	0.350	0.390	0.430	
1-1/4	42.2	48	48	0.500	0.686	0.959	0.500	0.686	-	0.696	-	-	-	-	-	-	0.470	0.640	0.690	0.700	
1-1/2	48.3	57	57	0.720	0.990	1.620	0.720	0.990	-	1.230	-	-	-	-	-	-	0.680	0.850	1.000	1.240	
2	60.3	64	64	1.070	1.430	2.450	1.070	1.430	-	2.070	-	-	-	-	-	-	0.850	1.130	1.440	2.080	
2-1/2	73.0	76	76	2.070	2.760	4.590	2.070	2.760	-	3.420	-	-	-	-	-	-	1.360	2.090	2.790	3.450	
3	88.9	86	86	2.860	3.530	6.450	2.860	3.530	-	4.540	-	-	-	-	-	-	1.800	3.020	3.500	4.590	
3-1/2	101.6	95	95	3.630	5.070	8.200	3.630	5.070	-	6.550	-	-	-	-	-	-	2.120	3.600	5.440	-	
4	114.3	105	105	4.830	6.330	11.10	4.830	6.330	8.010	9.260	-	-	-	-	-	-	2.900	5.160	6.390	9.350	
5	141.3	124	124	7.720	10.00	18.10	7.720	10.00	13.30	15.70	-	-	-	-	-	-	4.480	7.600	10.10	15.90	
6	168.3	143	143	11.20	16.80	27.50	11.20	16.80	19.70	23.90	-	11.20	-	-	-	-	6.210	11.92	16.90	23.30	
8	219.1	178	178	20.50	30.00	47.00	20.50	30.00	39.20	47.00	-	20.50	20.50	24.30	32.40	42.10	11.70	20.30	30.30	-	
10	273.0	216	216	36.60	44.10	82.20	36.60	51.00	72.10	90.20	-	36.60	36.60	44.10	61.40	82.20	18.00	35.20	44.20	-	
12	323.8	254	254	48.60	69.50	107.0	50.20	95.80	111.0	147.0	-	48.60	48.60	78.20	93.70	113.0	23.70	45.80	70.80	-	
14	355.6	279	279	66.40	81.50	-	71.20	129.0	202.0	260.0	66.40	66.40	66.40	129.0	202.0	260.0	28.60	64.00	-	-	
16	406.4	305	305	71.30	110.0	-	110.0	173.0	277.0	354.0	71.30	71.30	71.30	173.0	277.0	354.0	35.20	90.00	-	-	
18	457.0	343	343	131.0	145.0	-	156.0	253.0	396.0	501.0	131.0	131.0	145.0	-	-	-	-	-	-	-	
20	508.0	381	381	173.0	175.0	-	204.0	353.0	535.0	684.0	173.0	173.0	175.0	-	-	-	-	-	-	-	
22	559.0	419	419	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
24	610.0	432	432	274.0	300.0	-	343.0	597.0	863.0	1090	274.0	274.0	348.0	-	-	-	-	-	-	-	